


# HIGH ROLLER

Hi Folks,

When installing the Front Wheel, page 4 of the Assembly Manual tells you that 1-2 bolt threads should be showing from the end of the nut when tight.

**DUE TO MANUFACTURING CHANGES, THIS IS NOT CORRECT!  
ONLY TIGHTEN UNTIL THE THREADS ARE FLUSH WITH THE END OF THE NUT.**

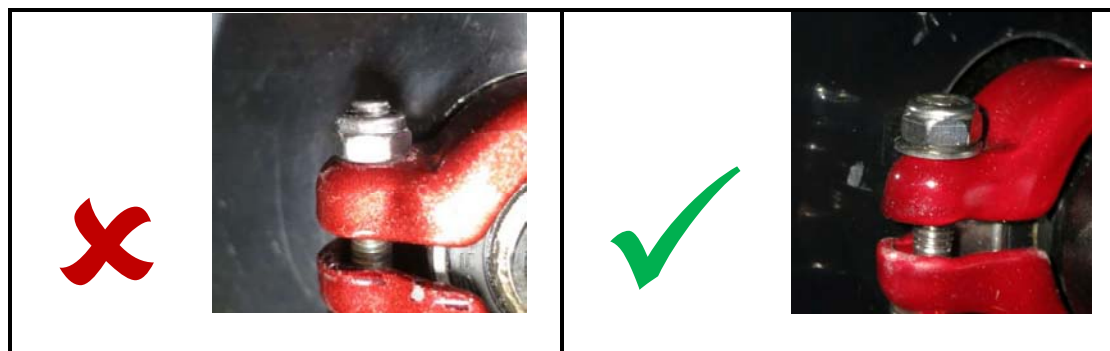

As always, let us know if you have any questions at all.

Thanks!

High Roller Team  
HighRollerUSA.com/support  
720-989-1969